

QRB06001 Datasheet

2.4/5 GHz Compound-loop Dual-band Antenna

Applications

- Wi-Fi IoT modules
- Routers

Features

- Omnidirectional radiation pattern
- Standard low-cost FR4 material
- Significant isolation in the 5.825GHz – 5.945GHz

Key Specifications

- Average total efficiency
 - 80+ % (2.4 GHz)
 - 90+ % (5 GHz)
- Peak gain
 - 2.4 dBi (2.4 GHz)
 - 5.6 dBi (5 GHz)

Overview

The QuantalRF QRB06001 is a high-efficiency dual-band (2.4/5GHz) PCB antenna for Wi-Fi 4, Wi-Fi 5, Wi-Fi 6 and Wi-Fi 7. While providing an omnidirectional radiation pattern in the 2.4/5G band, this design is intended to provide significant isolation in-between the 5G and 6G bands i.e., 5.835GHz – 5.945GHz when combined with the QRC07004 antenna. This combination could be ideal for applications where several 5G and 6G antennas are placed in close proximity of each other. The base design which is specified in this data sheet can be customized to specific use cases and applications to ensure that all customer demands are met.

Contents

- 1 Antenna Specifications 3
 - 1.1 Electrical Specifications 3
 - 1.2 Mechanical and Environmental Specifications 3
- 2 Antenna Performance 4
 - 2.1 VSWR 4
 - 2.2 Return loss 5
 - 2.3 Efficiency 6
 - 2.4 Peak gain..... 7
 - 2.5 2D Radiation patterns..... 8
 - 2.5.1 Azimuth plane..... 8
 - 2.5.2 Elevation plane 8
 - 2.6 Isolation (in proximity of the QRC07004 6G antenna) 9

1 Antenna Specifications

1.1 Electrical Specifications

Table 1: General specifications

Parameter	Specification
Frequency range	2400 – 2500 MHz, 5150 – 5835 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omnidirectional

Table 2: Detailed specifications

Parameter	2400 – 2500 MHz	5150 – 5835 MHz
Maximum VSWR	1.8	2.2
Minimum return loss (dB)	11	8.5
Average efficiency (%)	80+	90+
Maximum peak gain (dBi)	2.4	5.6

1.2 Mechanical and Environmental Specifications

Parameter	Specification
Antenna dimensions	29.5 mm x 24.1 mm
Antenna type	Integrated on PCB
Material	FR4 ($\epsilon_r = 4.4$, $\tan\delta = 0.02$)
Operating temperature	-40C to +85C
Storage temperature	-40C to +85C

2 Antenna Performance

2.1 VSWR

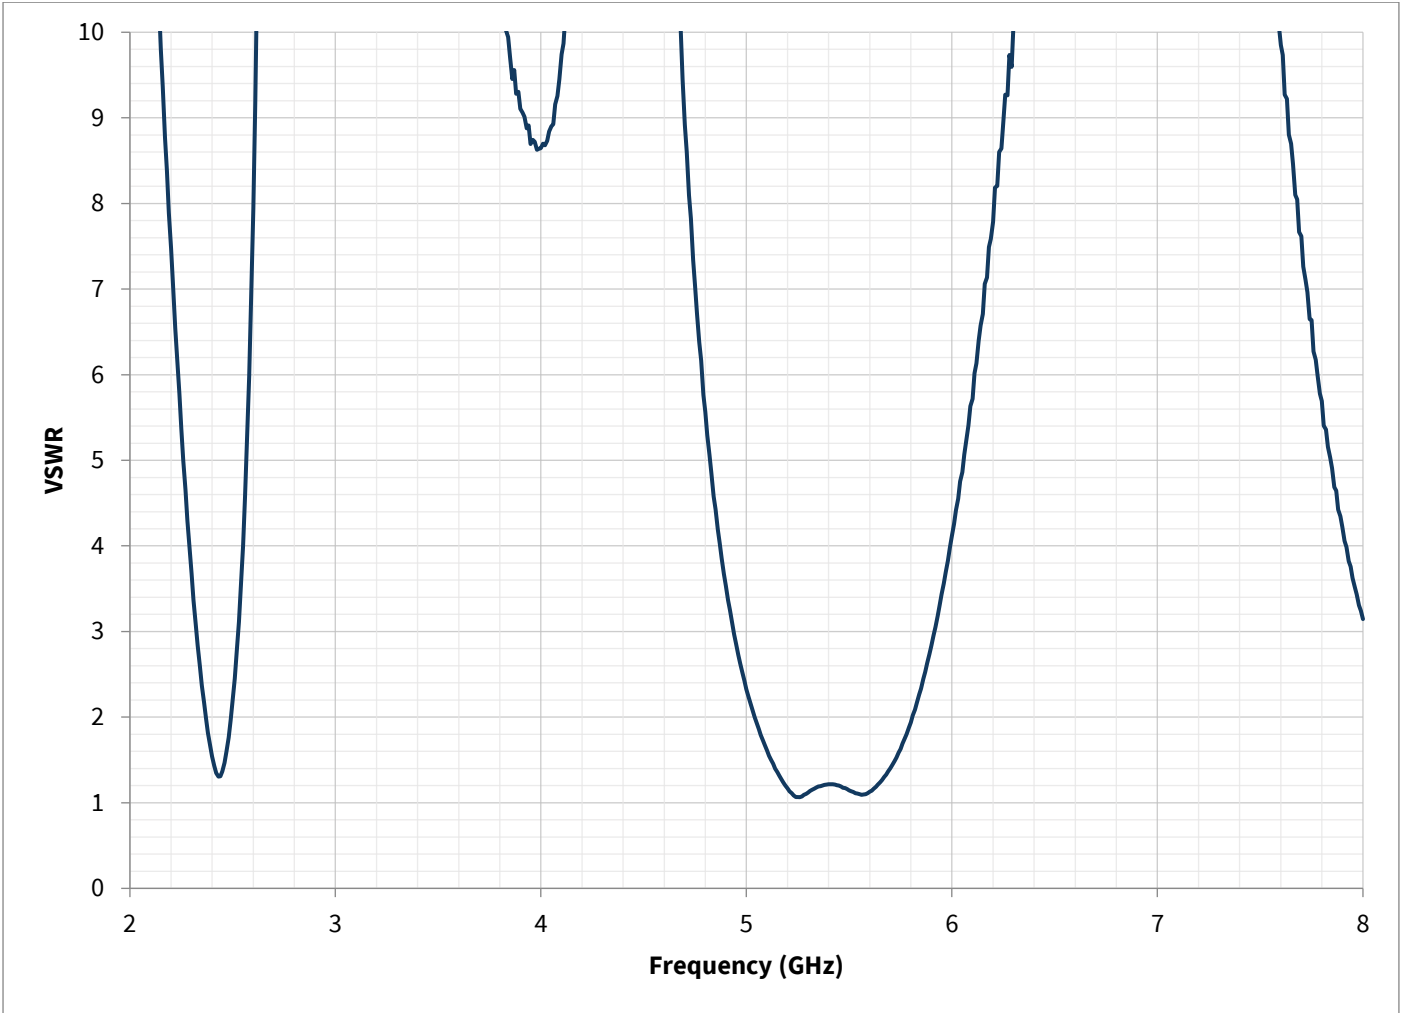


Table 3: 2.4 GHz VSWR

Frequency (MHz)	2400	2420	2440	2460	2480
VSWR	1.5	1.3	1.3	1.5	1.8

Table 4: 5 GHz VSWR

Frequency (MHz)	5150	5200	5250	5300	5350
VSWR	1.4	1.2	1.	1.1	1.2
Frequency (MHz)	5400	5450	5500	5550	5600
VSWR	1.2	1.2	1.1	1.1	1.1
Frequency (MHz)	5650	5700	5750	5800	5835
VSWR	1.2	1.4	1.6	1.9	2.2

2.2 Return loss

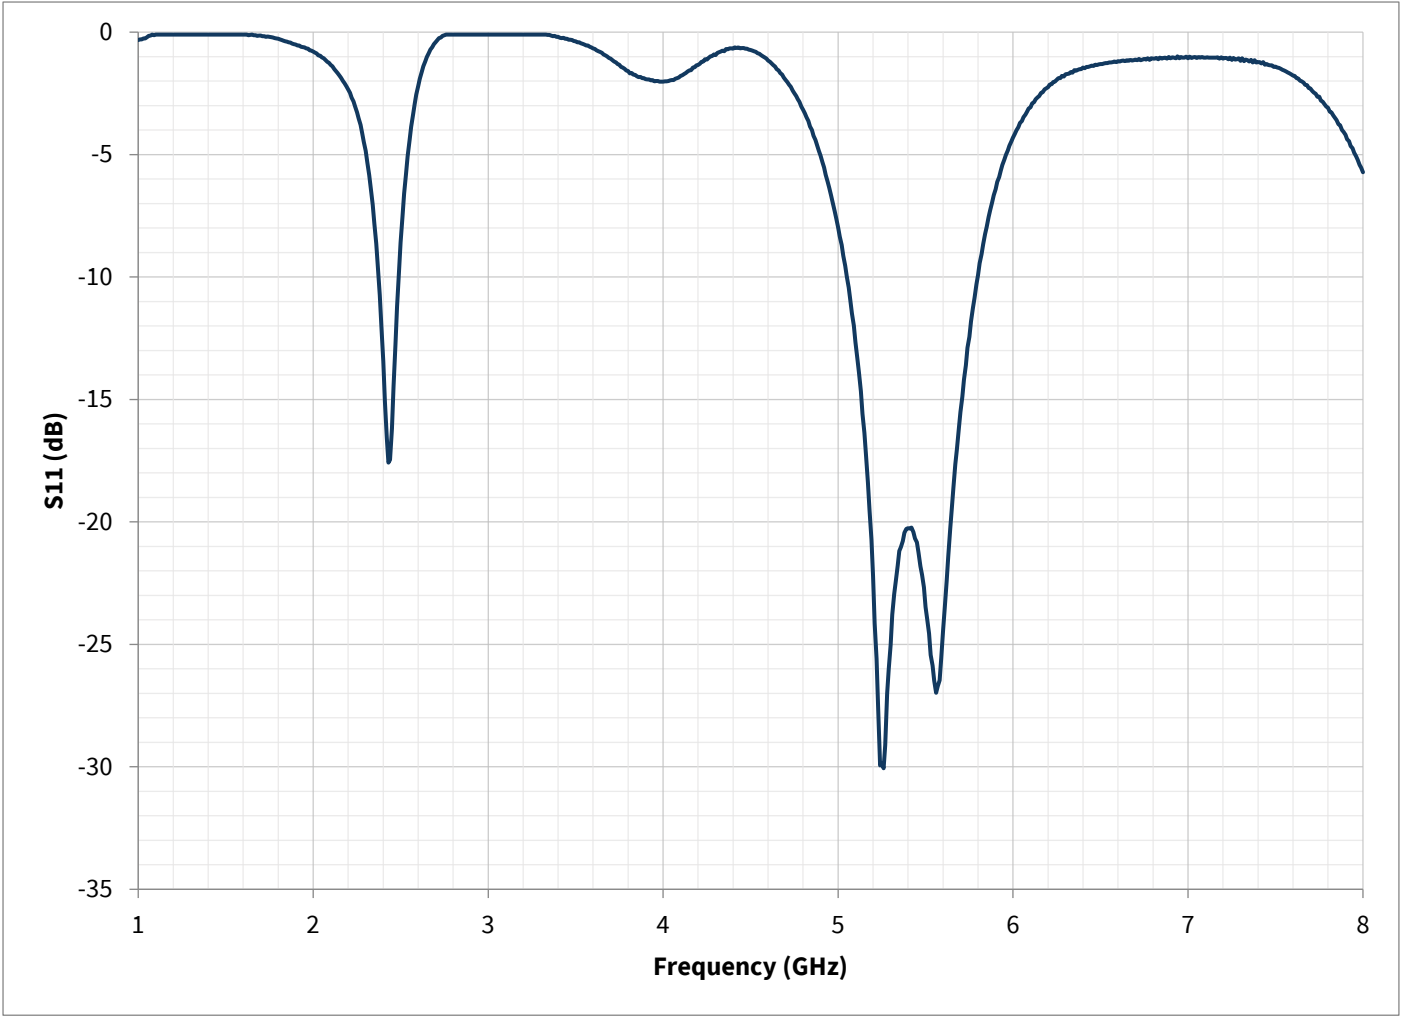


Table 5: 2.4 GHz Return loss (dB)

Frequency (MHz)	2400	2420	2440	2460	2480
Return loss (dB)	13.4	16.6	17.5	14.5	11.2

Table 6: 5 GHz Return loss (dB)

Frequency (MHz)	5150	5200	5250	5300	5350
Return loss (dB)	16.4	22.2	29.8	25.0	21.2
Frequency (MHz)	5400	5450	5500	5550	5600
Return loss (dB)	20.3	20.8	23.5	26.5	24.4
Frequency (MHz)	5650	5700	5750	5800	5835
Return loss (dB)	19.4	15.5	12.4	9.9	8.5

2.3 Efficiency

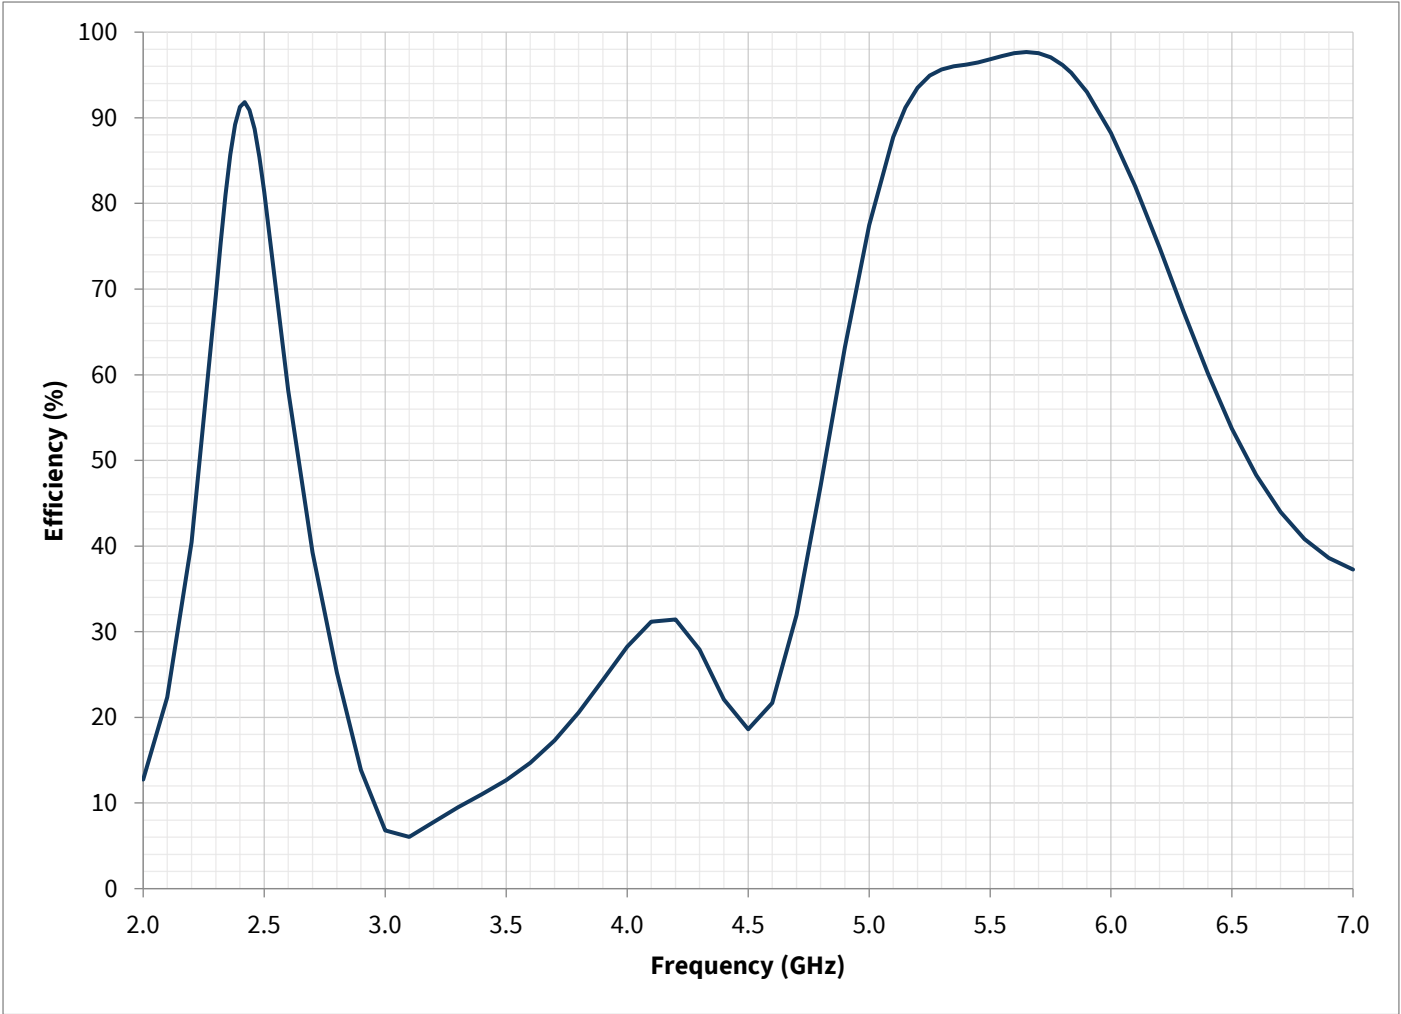


Table 7: 2.4 GHz Efficiency (%)

Frequency (MHz)	2400	2420	2440	2460	2480
Efficiency (%)	91.3	91.8	90.1	88.7	85.4

Table 8: 5 GHz Efficiency (%)

Frequency (MHz)	5150	5200	5250	5300	5350
Efficiency (%)	91.2	93.5	94.9	95.6	96.0
Frequency (MHz)	5400	5450	5500	5550	5600
Efficiency (%)	96.2	96.5	96.8	97.2	97.5
Frequency (MHz)	5650	5700	5750	5800	5835
Efficiency (%)	97.7	97.5	97.0	96.1	95.2

2.4 Peak gain

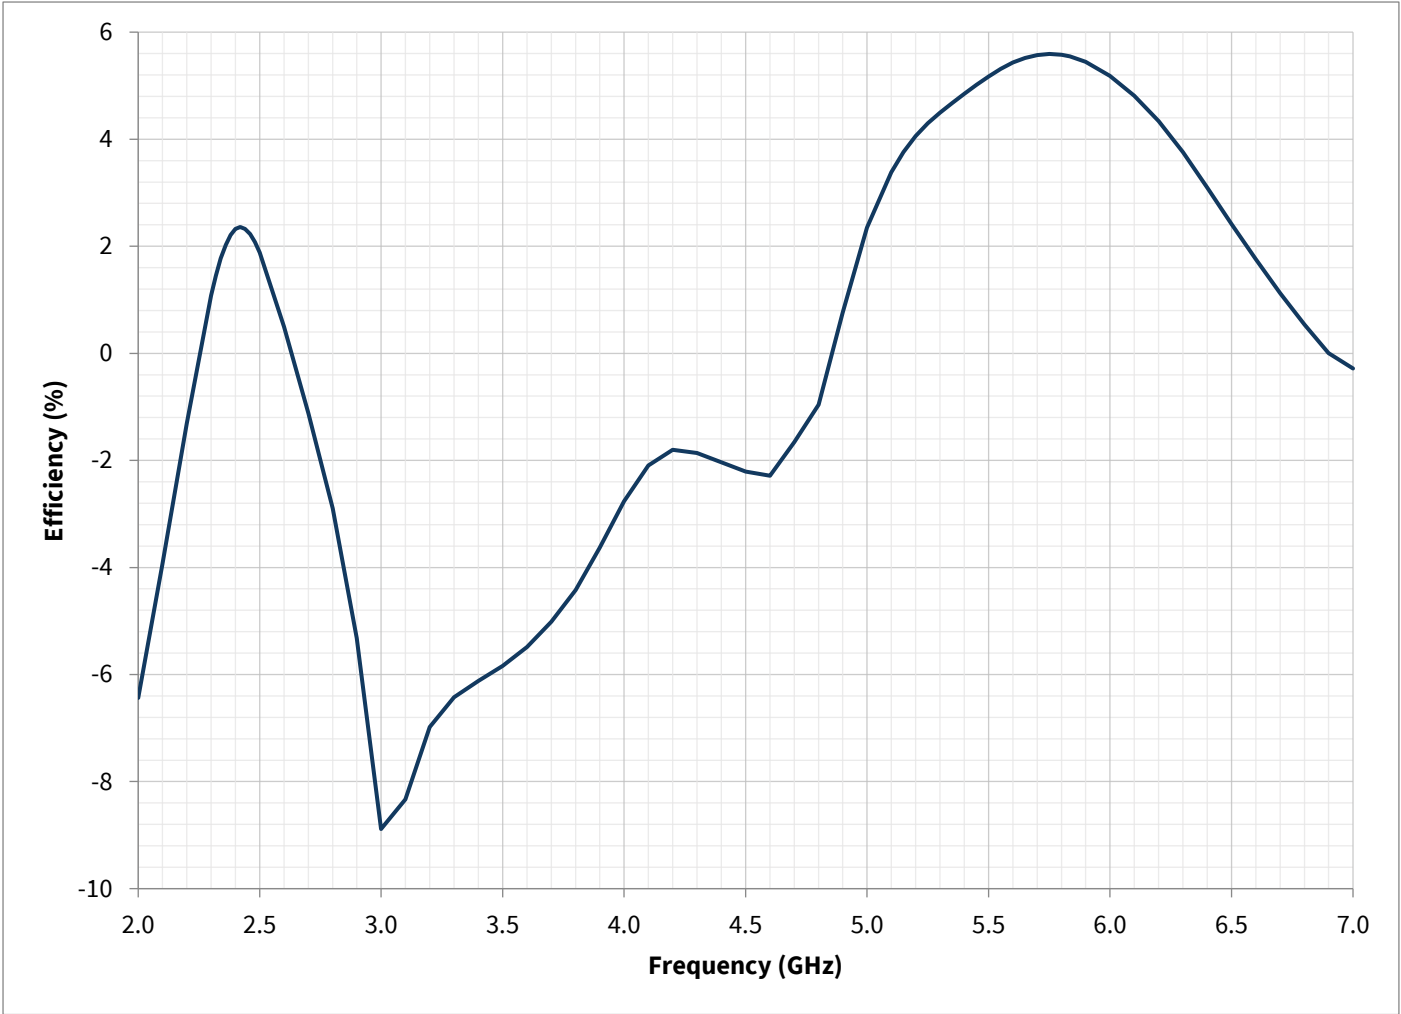


Table 9: 2.4 GHz Peak gain (dBi)

Frequency (MHz)	2400	2420	2440	2460	2480
Peak gain (dBi)	2.3	2.4	2.3	2.2	2.0


Table 10: 5 GHz Peak gain (dBi)

Frequency (MHz)	5150	5200	5250	5300	5350
Peak gain (dBi)	3.8	4.1	4.3	4.5	4.7
Frequency (MHz)	5400	5450	5500	5550	5600
Peak gain (dBi)	4.8	5.0	5.2	5.3	5.4
Frequency (MHz)	5650	5700	5750	5800	5835
Peak gain (dBi)	5.5	5.6	5.6	5.6	5.5


2.5 2D Radiation patterns

2.5.1 Azimuth plane

2.4 GHz azimuth plane

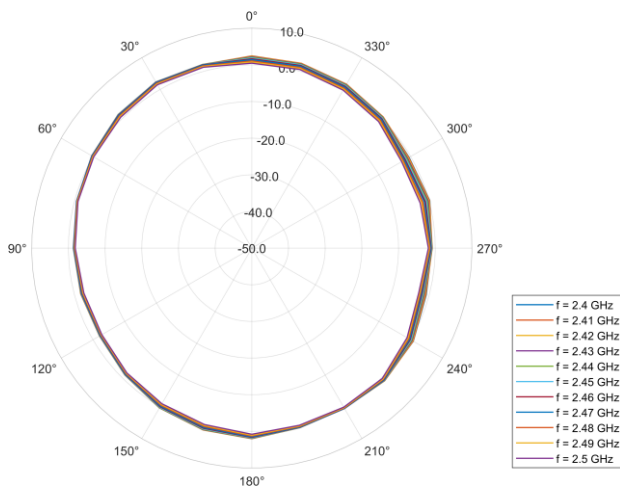


5 GHz azimuth plane

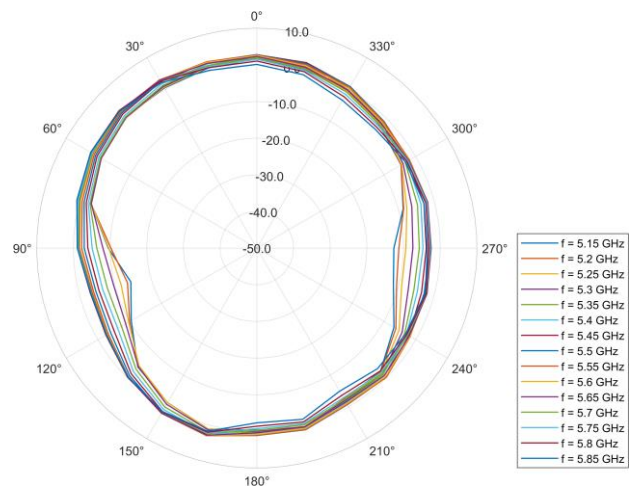


2.5.2 Elevation plane

2.4 GHz elevation plane

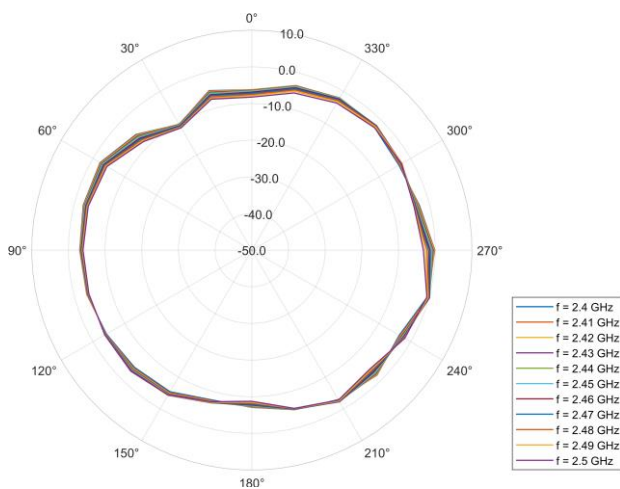


5 GHz elevation plane

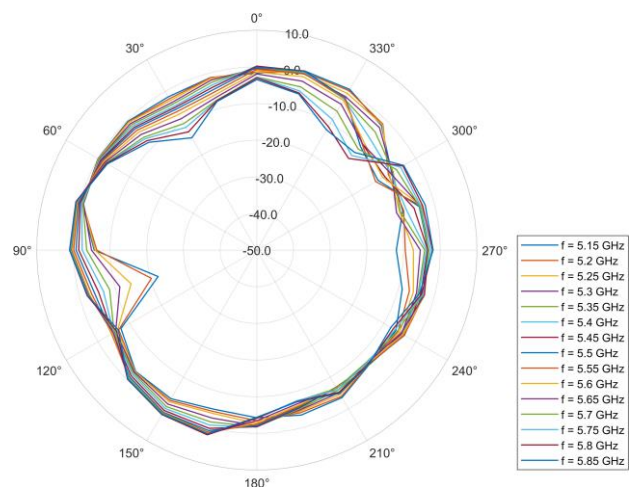

2.6 Isolation (in proximity of the QRC07004 6G antenna)

Measured at a center-to-center distance of 40mm between the two antennas.

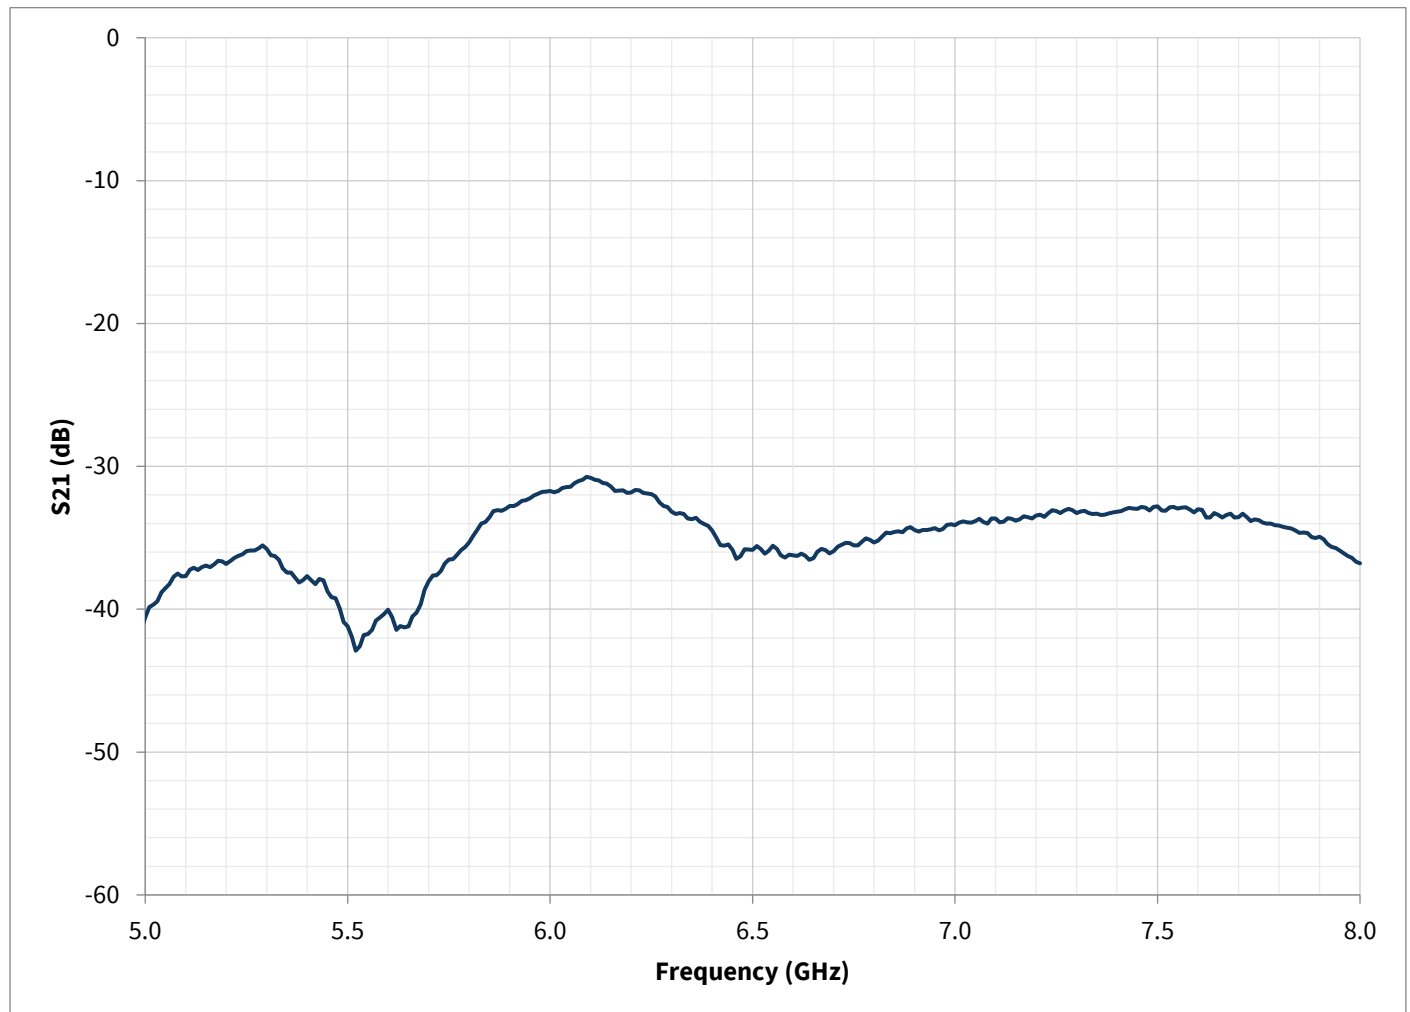

RoHS Compliance

The part is compliant with the 2011/65/EU RoHS directive, as amended by Directive 2015/863/EU.

Contact Information

For the latest specifications, additional product information and support:

sales@quantalrf.com

Learn more at quantalrf.com

Disclaimer

Limited warranty and liability Information in this document is believed to be accurate and reliable. However, QuantalRF does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of the use of such information.

Right to make changes QuantalRF reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.